

#49475

12992

10/15

4cp

#49475ENCIN-P20

FAB FILM

Product Highlights

FAB FILM'S revolutionary formula will prevent rust and long term corrosion on both ferrous and non-ferrous metals. This product is flexible and will not crack once the coating has fully cured. Flexible film coating will follow the movement on the treated surface area. Remains intact even in environments of extreme movement or vibration.

FAB FILM is designed to be used on:

- Stored Parts & Components
- Drilling Equipment
- Valves
- Castings
- Shipments For Transit
- Stampings
- Exposed Metal
- Racking
- Pipe Fittings
- Fabricated Parts
- Housings, Etc.



P.I.N. I-115

ENCORE INDUSTRIAL PRODUCTS LLC


P.O. Box 300
Barker, TX 77412-0300
281-944-4777

or

1-877-703-3044

www.encoreindustrial.com

ENCORE™
INDUSTRIAL PRODUCTS

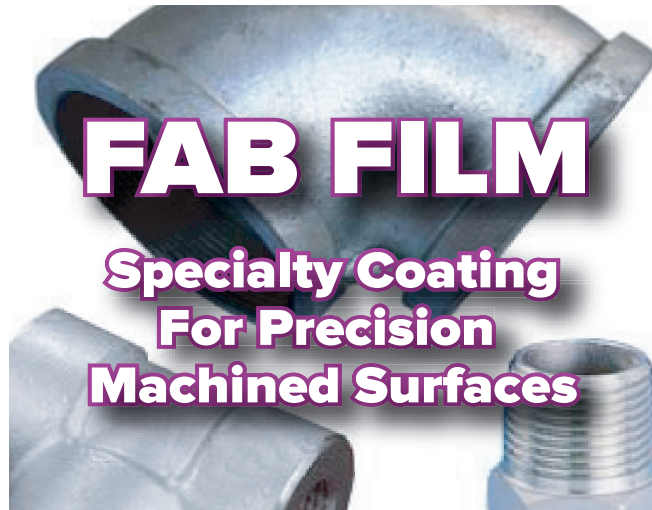

FAB FILM

Specialty Coating For Precision Machined Surfaces

Revestimiento de Especialidad Precisión las Superficies Mecanizadas

Flexible Coating Will Not Crack, Flake or Peel

Seals Out Moisture

Prevents Corrosion

Designed For Use on Ferrous and Non-Ferrous Metals

Indoor/Outdoor Use

Meets Military Specs MIL-C-16173D & MIL-C-83933A

Offshore Rated

KEEP OUT OF REACH OF CHILDREN

MANTENER FUERA DEL ALCANCE DE LOS NIÑOS

DANGER:

EXTREMELY FLAMMABLE AEROSOL. PRESSURIZED CONTAINER MAY BURST IF HEATED. CAUSES MILD SKIN IRRITATION. CAUSES SERIOUS EYE IRRITATION.

PELIGRO: EXTREMADAMENTE INFLAMABLE AEROSOL. CONTENEDORES A PRESIÓN PUEDEN EXPLOTAR SI SE CALIENTAN. PUEDE CAUSAR SOMNOLENCIA O MAREOS. CAUSAN IRRITACIONES EN LA PIEL. CAUSAN IRRITACIONES OCULARES GRAVES.

NET WT. 15 OZ. (425 grams)

Directions For Use

- STEP 1. Shake can vigorously for one minute after mixing ball begins to rattle.
- STEP 2. Clean surface to bare metal.
- STEP 3. Spray even coat over entire surface. If needed, second coat may be applied in 5 minutes.
- STEP 4. Coating will set up in 2 to 3 hours.

Precautionary Statement

If medical advice is needed, have product container or label at hand. Keep out of reach of children. Read label before use. Wash thoroughly after handling. Wear eye protection/face protection. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Do not pierce or burn, even after use. If skin irritation occurs: Get medical advice/attention. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F. Dispose of contents and container in accordance with all local, regional, national and international regulations.

Compositional Information

Contains: Stoddard Solvent (CAS#8052-41-3), Propane (CAS#74-98-6), Butane (CAS#106-97-8), Isobutane (CAS#75-28-5).

Read Safety Data Sheet before using.

Made in U.S.A.

NOT AVAILABLE FOR SALE IN CALIFORNIA.

HMIS RATING:

Health	1
Flammability	3
Reactivity	0
Personal Protection	A

